


# Ring to Ring Slings

## Features & Benefits

- Constructed from Sterling Rope's 12-strand Hollow Braid.
- Coated for abrasion resistance.
- Available in 3 diameters - 12.7 mm, 15.9 mm, and 19.1 mm.
- Features Notch's hard-coated anodized rigging thimbles.
- Creates an easy-to-position rigging anchor point.
- Double-headed option allows a larger bend radius on rigging lines.
- Assembled in-house by our expert Rope Logic splicers.
- Retrieval version available (\*)

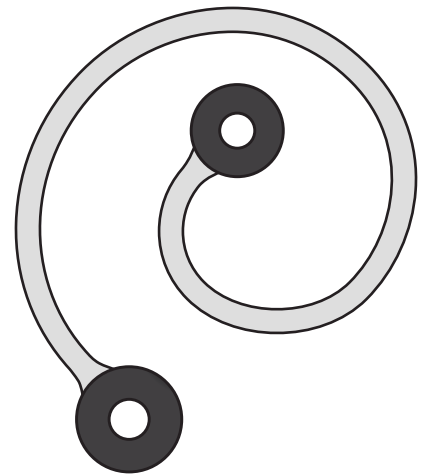

ITEM #	DIAMETER	LENGTH	WLL 5:1 (KG)	HARDWARE	COLOUR	UPC
RIGG-RLOG-0027	12.7 mm	1 m	1091	28 mm + 20 mm Ring *	Purple	5607501190
RIGG-RLOG-0028	15.9 mm	1.5 m	1727	28 mm + 28 mm Ring	Blue	5607501190
RIGG-RLOG-0029	15.9 mm	1.5 m	1727	28 mm + 28 mm Rings	Blue	5607501190
RIGG-RLOG-0030	19.1 mm	1.5 m	2364	38 mm + x 2 28 mm Ring *	Pink	5607501190
RIGG-RLOG-0031	19.1 mm	1.5 m	2364	28 mm + x 2 38 mm Ring *	Pink	5607501190

