


Whoopie Slings

Features & Benefits

- Constructed from Sterling Rope's 12-strand Hollow Braid.
- Coated for abrasion resistance.
- Available in 4 diameters – 12.7 mm, 15.9 mm, 19.1 mm, and 22.2 mm.
- Features options of Notch hard-coated anodized rigging thimbles or Notch SafeBloc.
- Creates a versatile, broad-ranging rigging solution across multiple applications.
- Assembled in-house by our expert Rope Logic splicers.

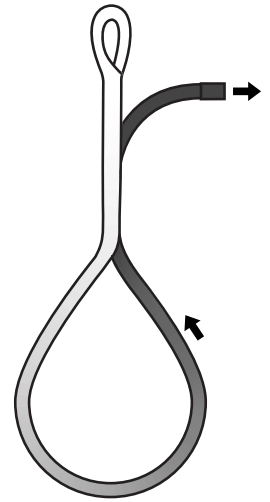

ITEM #	DIAMETER	LENGTH	WLL 5:1 (KG)	HARDWARE	COLOUR	UPC
RIGG-RLOG-0014	12.7 mm	1.5 m	1091	None	Purple	5056519900688
RIGG-RLOG-0015	12.7 mm	1.5 m	1091	20 mm Ring	Purple	5056519900695
RIGG-RLOG-0016	15.9 mm	3 m	1727	None	Blue	5056519900701
RIGG-RLOG-0017	19.1 mm	3 m	2364	None	Pink	5056519900718
RIGG-RLOG-0018	19.1 mm	3 m	2364	SafeBloc	Pink	5056519900725
RIGG-RLOG-0019	19.1 mm	3 m	2364	28 mm Ring	Pink	5056519900732
RIGG-RLOG-0020	22.2 mm	3 m	3545	None	Green	5056519900749